

# OG RIP

## Initial Configuration

**GRIP ON SQL**

2024-04-09

## Contents

1	Introduction .....	3
2	Required Configuration .....	4
2.1	New First Domain .....	4
2.1.1	Basics .....	4
2.1.2	Backup Shares & Schedules .....	5
2.1.3	Access to QGrip .....	5
2.1.4	Organogram .....	6
2.2	New Secondary Domain .....	7
2.2.1	Backup Shares & Schedules .....	7
3	Optional Configuration .....	8
3.1	Warnings FreeSpace .....	8
3.2	Template App Objects .....	8
3.3	Teams & Authorisation .....	9
3.4	Prices: Charges, Split Costs .....	9
3.5	Monitor-Mail (Complementary).....	9
3.6	FileTransfer-Method.....	10

## 1 Introduction

This document describes the initial configuration of QGrip and has been split in 2 sections.

### Required

The required configuration must be done, otherwise QGrip will not work as it should. The configurations can be adjusted at any time. The required configuration is needed whenever a new AD-Domain has been added to QGrip. This happens the first time the Setup runs in a, for QGrip, new Domain:

- New First Domain
- New Secondary Domain

### Optional

The optional configuration it not needed straight away. QGrip will run using default values or some functionality will be missing. The configuration can be added at any time.

### Warnings

If you miss or forget parts of the required configuration, QGrip will issue warning that the configuration is NotActivated or Incomplete.

### QGrip-UI

Initial Configuration of QGrip needs to be performed in the QGrip-UI. It is recommended that the QGrip-UI documents are reviewed prior to commencing configuration. You can start the QGrip.exe in the QGrip directory on one of the QGrip Servers. If it is the first time you use the QGrip-UI you will need to complete your personal details.

### QGrip-Admin


In QGrip, the account that performs the Initial Configuration, needs to be QGrip-Admin. The user who performs the Setup is automatically added to the QGrip-Admin group. This user should also perform the Initial Configuration.

If, for some reason, the initial configuration has to be done with a different account, that account needs to be QGrip-Admin. Use the following document:

Doc-Tab	Title	Section
Install	Install QGrip - Setup	Setup: QGrip-Admin

### Accessibility

At the bottom of the Main window, the message bar will indicate if there are Errors, Warnings and/or Personal messages.



After adding Backup Shares the Accessibility check will run. After each check you will receive a Personal message. For more information about the Accessibility check, see

Doc-Tab	Title	Section
QGrip-UI	Admin Menu-Infra	Accessibility

## 2 Required Configuration

The required part of the Initial Configuration is needed whenever a new AD-Domain has been added to QGrip.

### 2.1 New First Domain

## New First Domain


- 1. Basics**
- 2. Backup Shares & Schedules**
- 3. Access to QGrip**
- 4. Organogram**

Use this section if a New First Domain has been added, when QGrip has been installed for the very first time. There are dependencies between the different items and the following order in the pictures below should be followed, from top to bottom.

Use the documents from the Implementation-Aid-Kit as described in the 'Install Road Map' as input:


- 30-QGrip-Config & Standards
- 40-Organisation-Unit-Application
- 51-First Domain-Components

#### 2.1.1 Basics

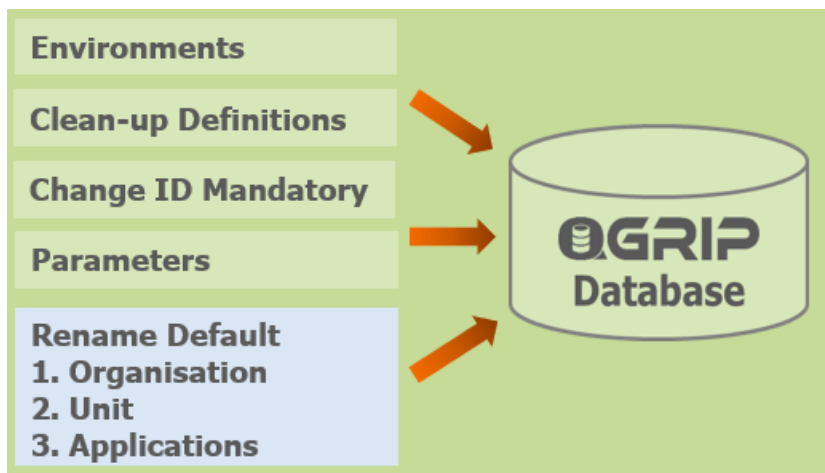


Doc-Tab	Title	Section
QGrip-UI	Admin Menu-Config	
QGrip-UI	Application Menu	Organisation-Unit-Application

## 2.1.2 Backup Shares & Schedules

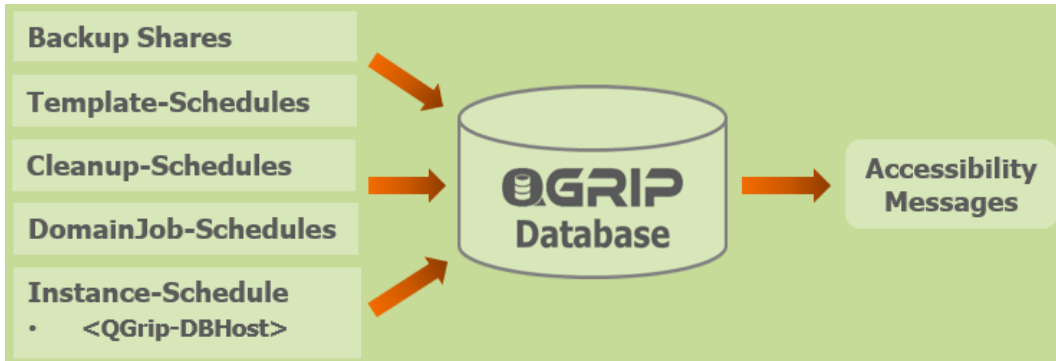

Doc-Tab	Title	Section
QGrip-UI	Admin Menu-Infra	Backup Shares Accessibility
QGrip-UI	Admin Menu-Jobs	Schedules

## 2.1.3 Access to QGrip

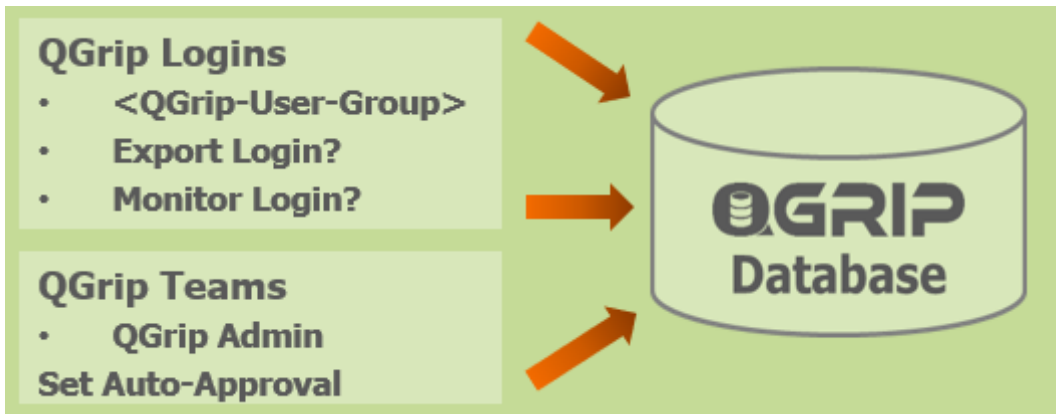


The screenshot shows a configuration window with two sections. The first section, 'AppObjects', has three dropdown menus: 'Request' (set to '\*All-Env'), 'Approve' (set to '\*All-Env'), and 'Auto-Approval' (set to 'No-Env'). The second section, 'Restore/Clone (To)', also has three dropdown menus: 'Request' (set to '\*All-Env'), 'Approve' (set to '\*All-Env'), and 'Auto-Approval' (set to 'No-Env'). Red boxes highlight the 'Auto-Approval' dropdowns in both sections.

Initially, the Auto-Approval for AppObjects and Restore/Clone (To) is set to No-Env for the QGrip-Admin Team. You might want to change this but, we strongly advise you never to set this to a value including the Production environment.

Doc-Tab	Title	Section
QGrip-UI	Admin Menu-Access to QGrip	QGrip Login Teams & Authorisation

#### 2.1.4 Organogram

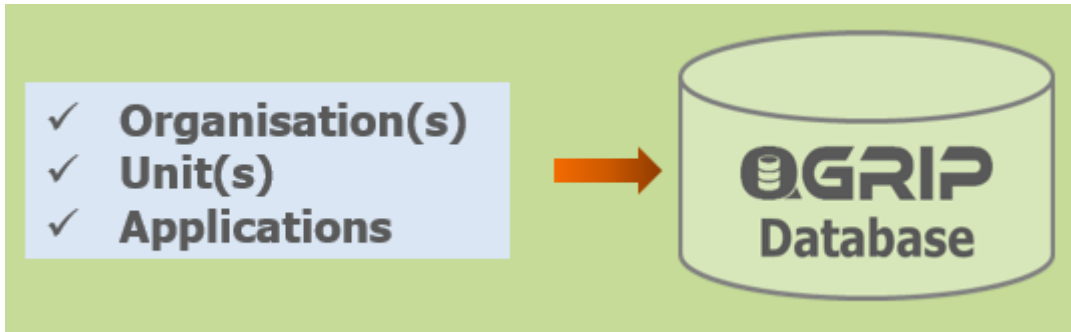

The Organisations, Units and Applications can be added either one-by-one or using the Import module.

Doc-Tab	Title	Section
QGrip-UI	Application Menu	Organisation-Unit-Application
QGrip-UI	Admin Menu	Import

## 2.2 New Secondary Domain

### New Secondary Domain

#### 1. Backup Shares & Schedules

Use this section if a New Secondary Domain has been added, when a QGrip Server has been installed for the first time in a Secondary Domain. There are dependencies between the different items and the following order in the pictures below should be followed, from top to bottom.

Use the documents from the Implementation-Aid-Kit as described in the 'Install Road Map' as input:

- 52-Secondary Domain X-Components

#### 2.2.1 Backup Shares & Schedules




Doc-Tab	Title	Section
QGrip-UI	Admin Menu-Infra	Backup Shares Accessibility
QGrip-UI	Admin Menu-Jobs	Schedules

## 3 Optional Configuration

1. Warnings FreeSpace
2. Template App Objects
3. Teams & Authorisation
4. Prices: Charges, Split Costs
5. Monitor-Mail
6. FileTransfer-Method


As long as the Optional Configuration has not taken place, QGrip will run using default values or some functionality will be missing.

### 3.1 Warnings FreeSpace

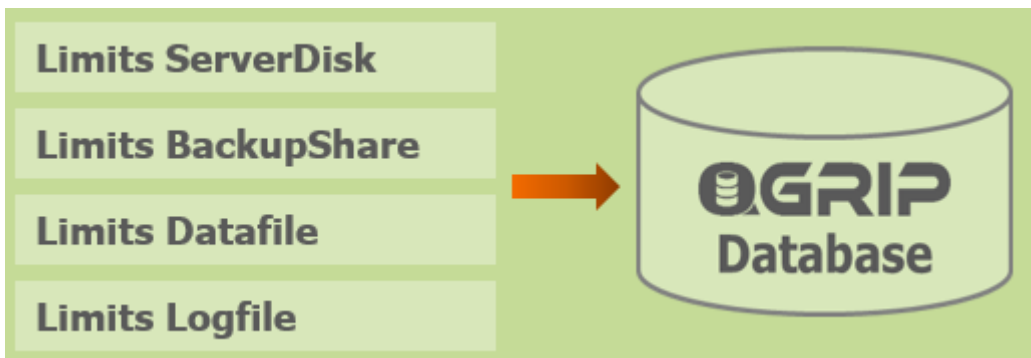

Doc-Tab	Title	Section
QGrip-UI	Admin Menu-Config	Parameters

### 3.2 Template App Objects

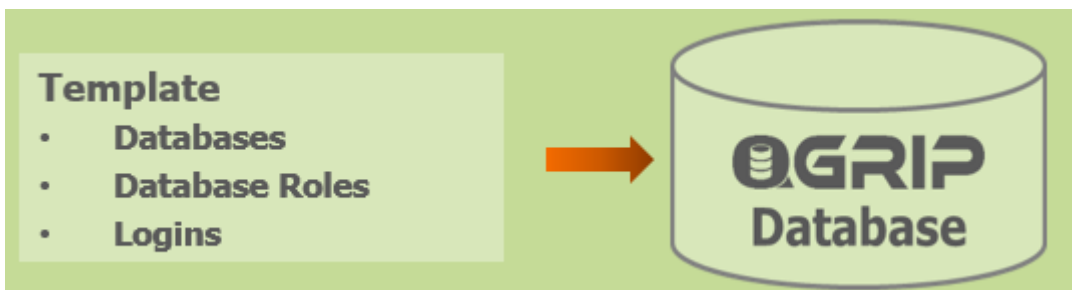


Use the document from the Implementation-Aid-Kit as described in the 'Install Road Map' as input:

- 30-QGrip-Config & Standards

Doc-Tab	Title	Section
QGrip-UI	Admin Menu	Parameters



### 3.3 Teams & Authorisation

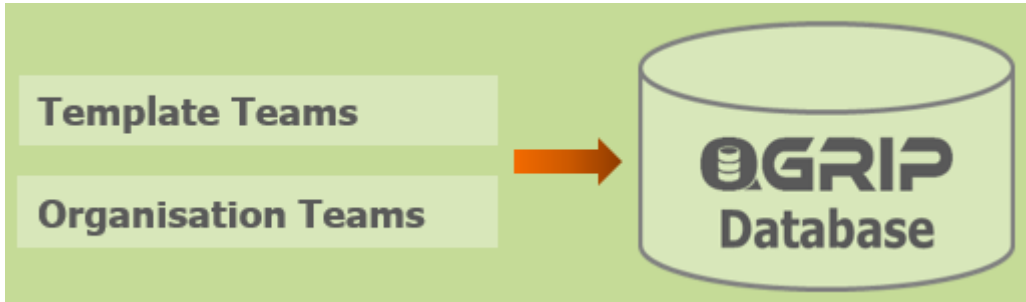


Configuring Teams & Authorisation can be complicated. You should read the following and set up a strategy before adjusting/defining teams.

Information needed during the Configuration:

Configuration Item	Description
Template-Teams	Your strategy
Organisation-Teams	Your strategy

Doc-Tab	Title	Section
Security	Teams & Authorisation	
QGrip-UI	Admin Menu-Access to QGrip	Teams & Authorisation


### 3.4 Prices: Charges, Split Costs

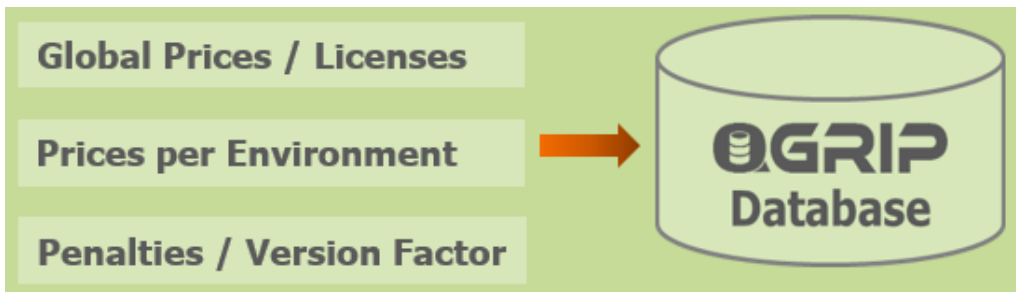

To use the Charges, Split Costs module, actual prices need to be added. Initially, the prices are filled with 'dummy' values.

Doc-Tab	Title	Section
Reports	Charges-Split Costs	
QGrip-UI	Reports Menu	Charges (Split Costs)

### 3.5 Monitor-Mail (Complementary)

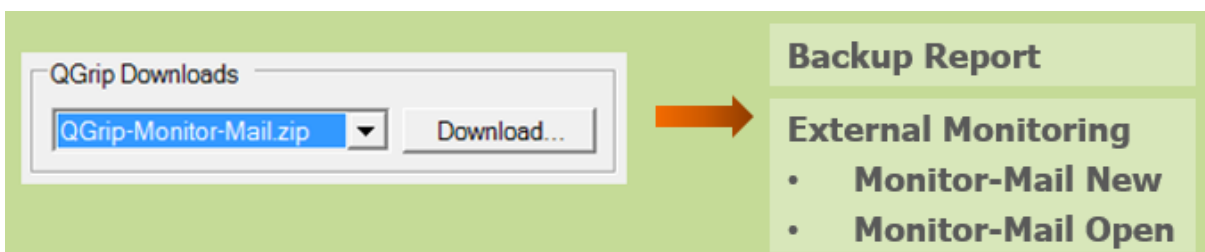

Download the Complementary executables, ini-files and create task-schedule statements from the Setup. The components should run on a QGrip Server in the First AD-Domain as gMSA\_QGrip\$.

Doc-Tab	Title	Section
Reports	Backup Report	
Plugin	Mail Backup Report	
Plugin	External Monitoring	Email - Complementary

### 3.6 FileTransfer-Method



A FileTransfer Method is only needed in a Multiple Domain Configuration and is used to exchange backup files during clones across the AD-Domains.

Doc-Tab	Title	Section
QGrip-UI	Admin Menu-Infra	FileTransfer-Method

